


PULSE 3



Give all your meters communications capability.

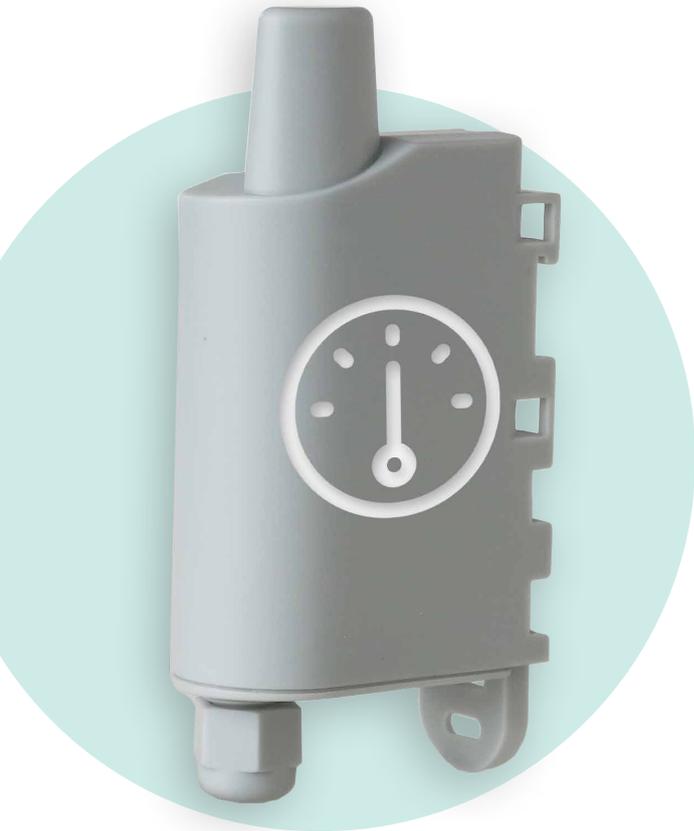

ALERT

- Monitor any leaks



MONITOR

- Receive readings feedback from gas and power meters
- Monitor over-consumption (gas, water and electricity)



FUNCTION

Pulse-based interface



BENEFITS

- Up to 2 connectable meters
- Detection of tampers and leaks
- Flow rate monitoring
- Locally and remotely configurable
- Data logging for optimal autonomy
- Redundancy for better service continuity

PRODUCT USES



Monitor your energy consumption on a building (water, electricity...).



Count the number of people or the traffic in a specific place.

TECHNICAL SPECIFICATIONS

- Periodic mode with or without log
 - Data redundancy
 - Soldered battery
- Dimensions: 105 x 50 x 27 mm
- Casing: IP67 (IP68 on request)
- Integrated fastening system: DIN rail, tube, wall, flange
 - Configurable Life Screen
- Alert concerning product, configuration error, low battery
- Zone: LoRaWAN: US902-928 - AS923 /Sigfox RC4
- Operating temperature range: -25°C / +70°C
 - Weight: 70 g
 - Standards:
 - AUS/NZ: IEC 62368-1(safety) / AS/NZS 4268:2012
 - US: FCC- Title 47 CFR Part 15
 - CANADA: RSS-247 Issue 2

