



loadsensing^w

WORLDSENSING

WIRELESS MONITORING SYSTEM


GATEWAY



WIRELESS DATA UNIT



SOFTWARE SUITE

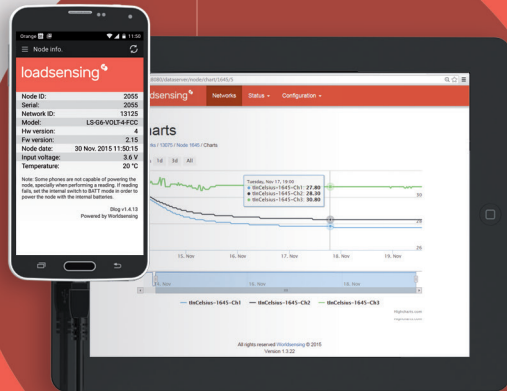

WIRELESS TILTMETER

loadsensing^W

WORLDSENSING

THE CONNECTED INFRASTRUCTURE SOLUTION MONITORING HOW STRUCTURES EVOLVE

Loadsensing is a data acquisition and monitoring system which combines state-of-the-art wireless monitoring and advanced software tools. It is widely recognized as the leading solution for connecting and monitoring infrastructures in remote locations.

Loadsensing devices are battery-powered and equipped with long-range, low-power wide area network (LPWA) radio communications and are compatible with a wide range of geotechnical sensors. The software suite is web-based and facilitates real-time data capture and analytics. It is also possible to set automatic alarms to make operations safer.


Mining and construction companies and operators of bridges, tunnels, dams, railways and many other inaccessible assets can now work with reliable data. Having access to this information and real-time insights enables operators to anticipate needs, manage their workforce, diminish risks, and even prevent disasters.

FEATURES

- Long-range communication of over 9 miles / 15km
- Truly low-power, 10 years of unattended runtime
- Wireless LPWA communication
- Supports most structural and geotechnical sensors (vibrating wire, digital, analog)
- Wireless tiltmeter
- Integrated alarm system
- User-friendly web software

BENEFITS

- Leverage already formatted data to optimize operations
- Remotely monitor hard-to-access infrastructures
- Cover a wide area with geotechnical sensors
- Easily add sensors to extend measurement range
- Save resources through fast implementation
- Decrease costs through easy maintenance
- Diminish risks and make operations safer

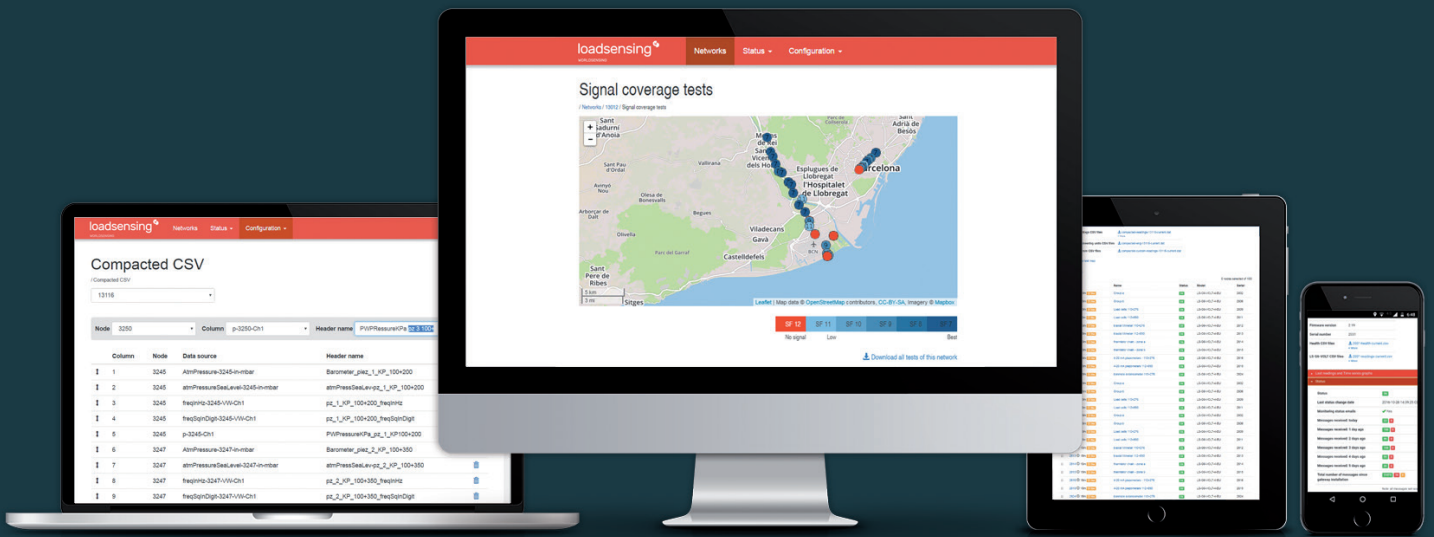

SOFTWARE SUITE


NETWORK AND ASSET MANAGEMENT SOFTWARE

- Network communications configuration and control
- Wireless data unit and sensor attributes display
- Wireless data unit configuration
- Sensor data in near real time
- Conversion of raw sensor data in engineering units
- Manual and automatic data download in .csv
- Data transmitted in a secure manner
- Remote change of sensor's sampling rate
- Data accessible through Modbus TCP
- Able to push data on user FTP

DATA MANAGEMENT SOFTWARE


- Sensor data visualization and download (tables and graphs)
- Topological view
- Creation of virtual variables
- Configuration of alarm thresholds
- Alarms sent to stakeholders by email
- Automatically generated reports (tables, graphs and notes)

HOW IT WORKS

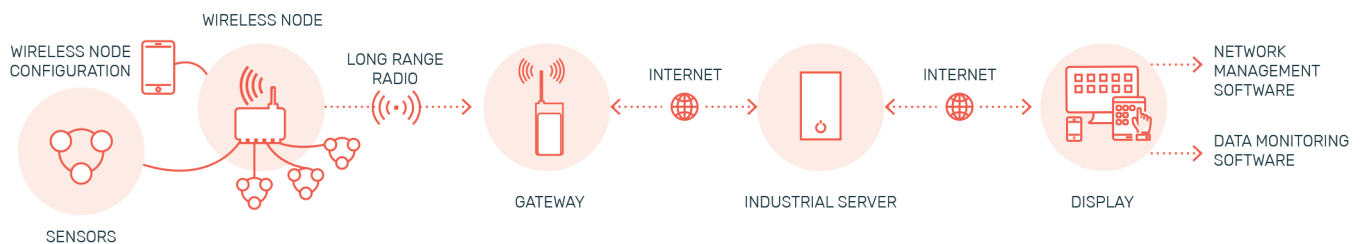

Operational Intelligence
for Mines and Industrial Companies

Worldsensing is not only among the best in the world at connecting distributed infrastructures with smart devices, we also know how to extract intelligence from collected data to transform operations. Our software solutions combine location intelligence with infrastructure monitoring.

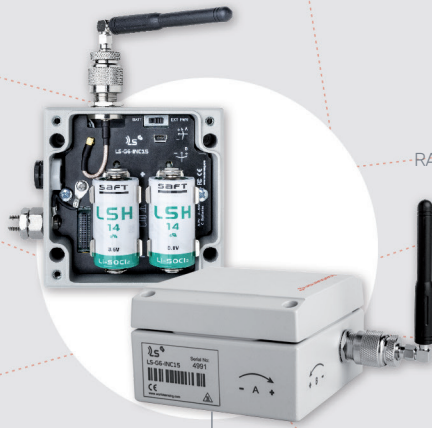

NODE: LS-G6-INC15

BOX DIMENSIONS (WxLxH): 100x100x61 mm
 OVERALL DIMENSIONS: 150x120x61 mm (excluding antenna)
 EXTERNAL ANTENNA: 100 mm length (including connector)
 HOUSING MATERIAL: Aluminium alloy
 Internal C-size 3.6 V High-power batteries, from 1 up to 2 batteries

NODE: LS-G6-VW-1P (POLYCARBONATE)

BOX DIMENSIONS (WxLxH): 151x80x60 mm
 OVERALL DIMENSIONS: 160x85x60 mm
 INTERNAL ANTENNA
 RADIO COVERAGE: 60 % of the achieved with the external antenna
 WITHOUT GROUNDING
 HOUSING MATERIAL: Polycarbonate
 Internal C-size 3.6 V High power batteries, 1 battery



WIRELESS TILTMETER
 LS-G6-INC15

APPLICATIONS

- Remote tilt monitoring from retaining and building walls
- Landslide monitoring
- Bridge pier monitoring
- Structural load monitoring
- Ground subsidence

SPECIFICATIONS

Type:	MEMS (Micro-Electro-Mechanical) Inclinometer
Range:	± 15°
Accuracy (± 5°):	0.03% FS / 0.004°
Accuracy full range:	0.17% FS / 0.025°
Resolution:	0.001°
Repeatability:	0.005°
Axes:	Two (biaxial)
Temperature sensor resolution:	0.1 °C
Temperature sensor accuracy:	±0.5 °C

BATTERY LIFE ESTIMATION Wireless tiltmeter

SAMPLING RATE	Barcelona temperature profile *	Singapore temperature profile*
5 min	1.2 years	1.1 years
1 h	5.8 years	4.7 years
6 h	8.3 years	6.4 years

* Estimations for 2 x saft LSH 14 batteries

VIBRATING WIRE 1ch and 5ch NODES
 LS-G6-VW-1P, LS-G6-VW-1M, LS-G6-VW-5

VIBRATING WIRE NODE 1ch and 5ch

VIBRATING WIRE

Measurement method: Embedded algorithms increasing immunity to noise

Excitation wave:	+/- 5 V
Measurement range:	300 to 7,000 Hz
Resolution (-40 to +85°C):	0.12 Hz
Accuracy (-40 to +85°C):	0.018 % FS

THERMISTOR

Measurement range:	0 ohm to 4 Mohm
Resolution:	1 ohm
Accuracy (20°C):	0.05°C (0.04 % FS)

BAROMETER

Pressure Range:	300 to 1,100 hPa
Relative Accuracy (950 to 1,050 hPa at 25°C):	±0.12 hPa

BATTERY LIFE ESTIMATION Vibrating wire nodes

CHANNELS & SAMPLING	BATTERIES*	BATTERY LIFE ESTIMATION*
1 CH 5 min	1 cell	3 years
1 CH 30 min	1 cell	7 years
5 CH 5 min	1 cell	1.5 years
5 CH 5 min	4 cell	5 years
5 CH 30 min	1 cell	4 years
5 CH 30 min	4 cell	>10 years

* Nominal capacity of each battery: 5.8 Ah. Considering laboratory conditions



NODE: LS-G6-VW-1M (ALUMINIUM)

BOX DIMENSIONS (WxLxH): 100x100x61 mm
 OVERALL DIMENSIONS: 140x120x61 mm (excluding antenna)
 EXTERNAL ANTENNA: 114 mm length (including connector)
 HOUSING MATERIAL: Aluminium alloy
 Internal C-size 3.6 V High power batteries, 1 battery

Nodes: LS-G6-ANALOG-4, LS-G6-DIG-2 and LS-G6-VW 5 ch

BOX DIMENSIONS (WxLxH): 100x200x61 mm
 OVERALL DIMENSIONS: 140x220x61 mm (excluding antenna)
 EXTERNAL ANTENNA: 114 mm length (including connector)
 HOUSING MATERIAL: Aluminium alloy
 Internal C-size 3.6 V High power batteries, from 1 up to 4 batteries



ANALOG NODE
 LS-G6-ANALOG-4

ANALOG NODE 4ch

Each channel is individually configured by the user

Power supply: 5 V DC / 12 V DC / 24 V DC up to 60 mA selectable for each channel

VOLTAGE

Measuring ranges [V DC]: +/-10 ; +/-1.25 (8x)

Accuracy (-40 to +85°C): +/- 0.05 % FS

CURRENT LOOP (2-3 wires)

Measuring range: 4-20 mA

Accuracy (0 to +50°C): 0.05 % FS

POTENTIOMETER (POT)

Accuracy (0 to +50°C): +/- 0.02 % FS

FULL WHEATSTONE BRIDGE (FWB)

Accuracy (0 to -50°C): +/- 0.1 % FS

THERMISTOR

Accuracy (0 to +50°C): +/- 0.2°C

PT 100

Accuracy (20°C): +/- 0.8°C

BATTERY LIFE ESTIMATION **

Channels & Sampling	BATTERY LIFE ESTIMATION **				
	Current @12V@24mA	Current @24V@24mA	Voltage @12V@24mA	FWB@5V@0.7k	Pot@5V@1.5k
Warm up time	1 second	1 second	1 second		
1 CH 5 min	6 months	4 months	5 months	1.5 years	1.5 years
1 CH 6 hours	>10 years	>10 years	>10 years	8.5 years	>10 years
4 CH 5 min	1.5 months	39 days	2 months	1.5 months	7 months
4 CH 6 hours	8 years	6.5 years	>10 years	8.5 years	>10 years

DIGITAL NODE
 LS-G6-DIG-2

DIGITAL NODE

One RS485 channel and two SDI-12 channels

Power supply: 12 V DC up to 120 mA

RS485 full or half duplex supported

Suitable for a chain of in-place inclinometers

Modbus RTU RS485

Supported sensors: RTS, Sisgeo and Geosense digital inclinometers

BATTERY LIFE ESTIMATION **

RST and Sisgeo chains of Inclinometers

Number of sensor	Sampling rate		
	6 hours	30 minutes	3 minutes
10 (RST)	>10 years	2.5 years	4 months
30 (RST)	5.2 years	4 months	26 days
10 (SISGEO)	4 years	5 months	30 days

SHARED SPECIFICATIONS

INTERNAL DATA STORAGE

Up to 72,500 readings including time and 5 sensors

Up to 200,000 readings including time and 1 sensor

Sampling rate: 30 seconds to 1 day

Time synchronization by radio: Time discipline better than ± 10 seconds

Operating temperature: -40°C to 80°C (-40°F to 175°F)

Weather protection: IP67

ACCESSORIES

ACCESSORIES

Soft LSH 14 C-size spiral cell

Node-mobile cable

External mounting brackets for wall mounting

Plate for pole mounting

Tiltmeter horizontal mounting plate


Tiltmeter vertical mounting bracket

** Estimations for 4 x soft LSH 14 batteries. Considering laboratory conditions

Specifications are subject to review and change without notice



HOW IT WORKS IN MINES

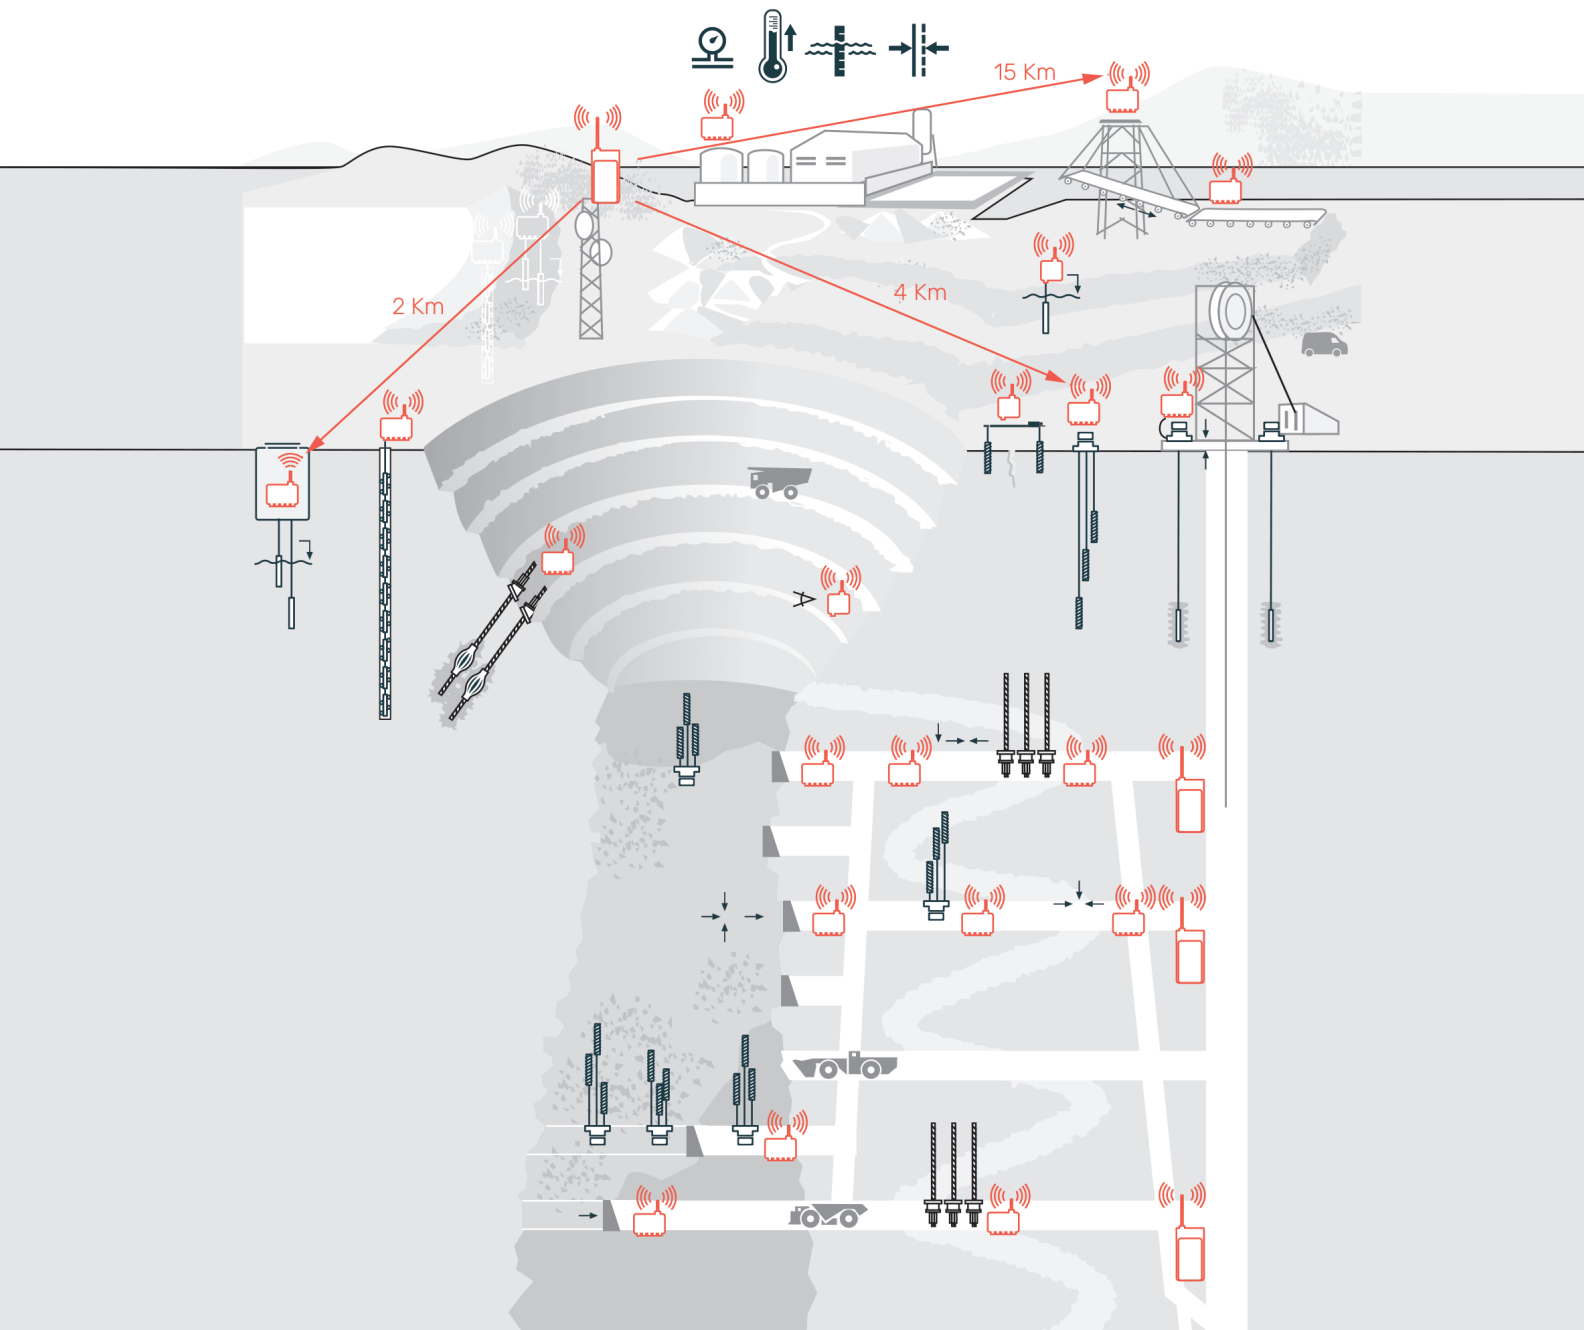



CONFIGURATION APP

DLOG APP

- Simple and fast connection to wireless node
- Runs on Android devices
- Easy sensor configuration: ID, sampling rate, frequency sweep, interface type, etc.
- Checks radio signal coverage
- Records coordinates (GPS)
- Downloads data from wireless node and sends by e-mail or saves it on the Android device
- Takes current reading
- Updates wireless node firmware



GATEWAY

BASE STATION

- ISM Sub 1 GHz band, sensitivity: down to -137 dBm
- Detachable omnidirectional 1/2 dipole
- Integrated GPS antenna
- GNSS High Sensitivity GPS module

POWER

- Power supply: 48 V DC PoE
- Nominal: 3 Watts
- DC power supply (ex.: solar panel use): 11 to 30 Volts

MECHANICAL

- Size: 210 x 310 x 170 mm, including mounting kit
- Weight: 2 kg including mounting kit
- IP67 rating
- Operating range: -20 to + 60 °C

NETWORK INTERFACES


- 10/100 Ethernet WAN (RJ45 PoE)
- Integrated 3G Modem & Antenna (HSDPA, EDGE, GPRS) quad band

LS gateways:

- 868 MHz ISM band
- 915 MHz FCC ISM band
- 915-928 MHz ISM band



HOW IT WORKS IN CITIES

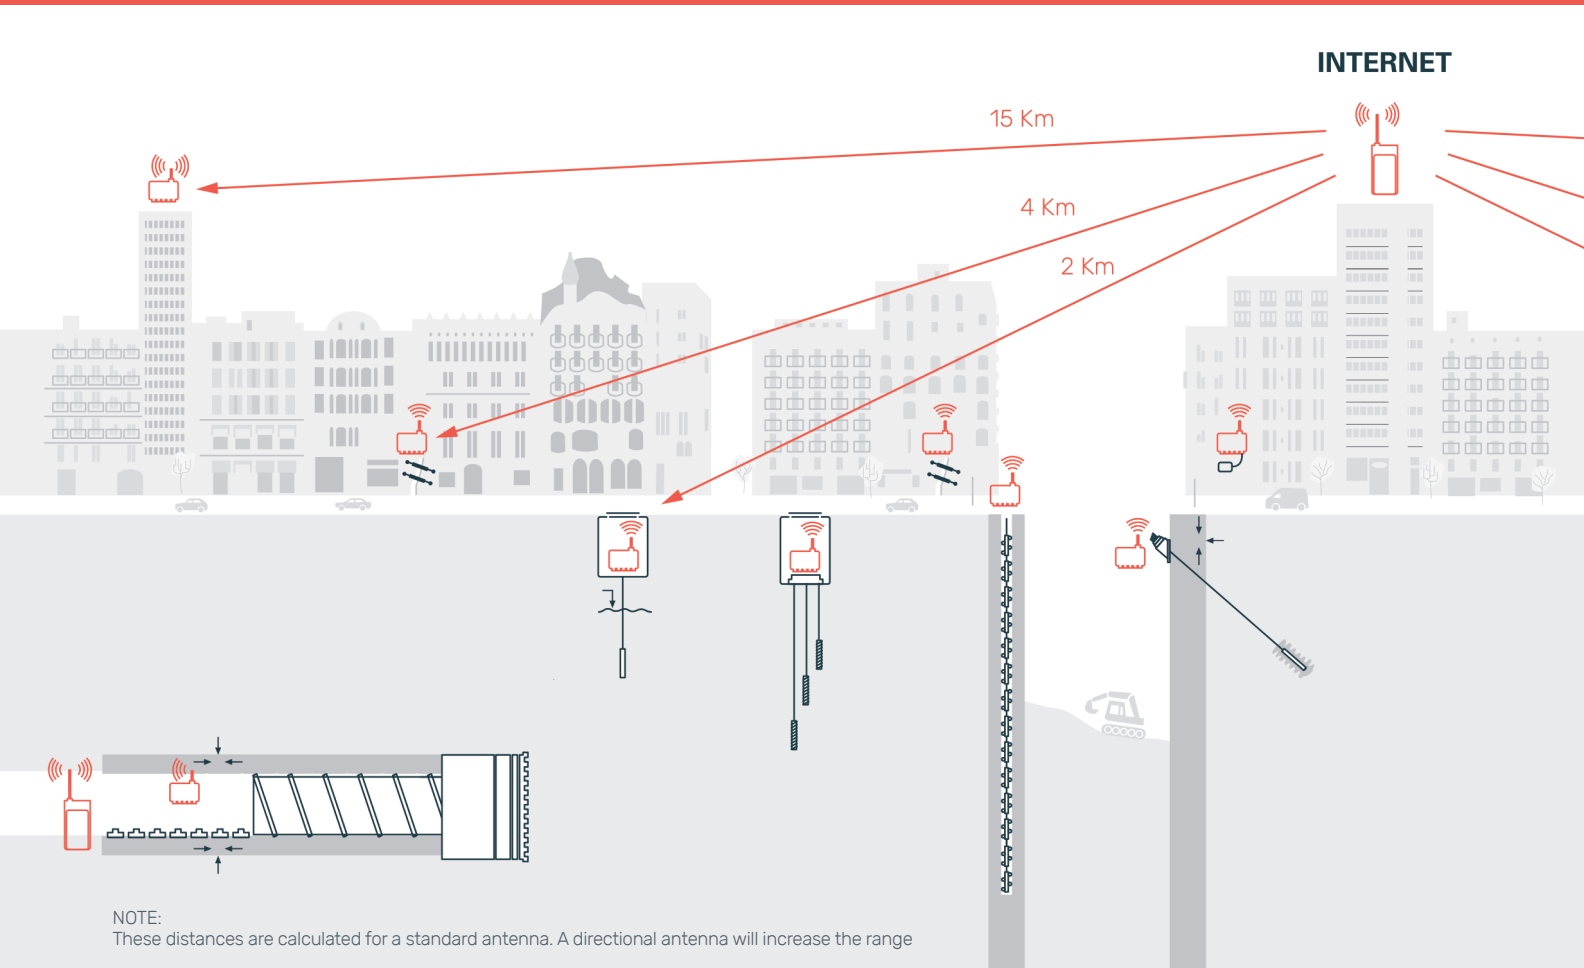

RADIO & APPLICATIONS

LONG RANGE RADIO

OPEN FIELD:	15 km
CITY STREET:	4 km
MANHOLE IN A CITY STREET:	2 km
TUNNEL:	4 km

RADIO SPECS

- ISM sub 1 GHz operating frequency bands adjustable to each territory requirements
- No repeaters needed
- High sensitivity: down to -137 dBm
- Transmission: +14 dBm high efficiency / +20 dBm
- Maximum link budget: 151 dB / 157 dB
- Remote sampling rate change
- Bidirectional communications capabilities

WORLD W SENSING

CONNECTED OPERATIONAL INTELLIGENCE



BARCELONA

Viriat 47, Edificio Numancia 1, 10th floor,
08014 Barcelona, Spain
(+34) 93 418 05 85

LONDON

9-10 Carlos Place, Mayfair
London W1K 3AT, UK
(+44) 203 807 2495

LOS ANGELES

1900 Avenue of the Stars, Suite 2430
90067 Los Angeles, CA, USA
(+1) 323 395 5120

sales@worldsensing.com
www.worldsensing.com