


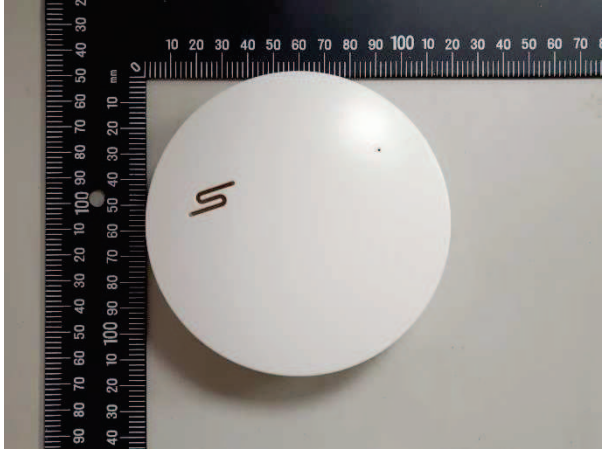

<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	<b>50354677-001</b>	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	238114375	Seite 1 von 11 <i>Page 1 of 11</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>		<b>Auftragsdatum:</b> <i>Order date:</i>	03-01-2020		
<b>Auftraggeber:</b> <i>Client:</i>	SITERWELL ELECTRONICS CO., LIMITED No.666 Qingfeng Road, Jiangbei District, Ningbo, Zhejiang 315034, P. R. China				
<b>Prüfgegenstand:</b> <i>Test item:</i>	Smoke alarm				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	GS529-H03, GS529A				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	Test of Conformance to LoRaWAN™ Specification V1.0.2				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	LoRa Alliance End Device Certification Requirements for EU 868MHz ISM Band				
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	06-01-2020				
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A001068886-001				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	10-01-2020~02-03-2020				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	Taipei, Taiwan				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland Taiwan Ltd.				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Bitte wählen / Please select...				
<b>überprüft von:</b> <i>reviewed by:</i>	<b>genehmigt von:</b> <i>authorized by:</i>				
<b>Datum:</b> 2020.03.24 <i>Date:</i>		<b>Datum:</b> 2020.03.24 <i>Date:</i>			
<b>Stellung / Position:</b>	<b>General Vice Manager</b>	<b>Stellung / Position:</b>	<b>Senior Project Manager</b>		
<b>Sonstiges / Other:</b>					
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar	5 = mangelhaft N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable	5 = poor N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be vösliplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Prüfbericht-Nr.: 50354677-001  
Test Report No.: 50354677-001

Seite 2 von 11  
Page 2 of 11

Revisions Revisions			
Revision Revision	Datum Date	Anmerkung Remark	Verfasser Author

Note: Latest revision report will replace all previous reports

## Table of contents

1	Product Information.....	4
	Submitted Documents:.....	5
	Remarks:.....	5
2	Test Equipment.....	6
3	Summary.....	7
	Verdicts of functional requirements:.....	7
	Verdict .....	7
	Supported optional features: .....	7
4	Test Case verdicts as per Test Specifications .....	8
	Test results per test case: .....	8
5	Test Results .....	10
	Detailed test results:.....	10
6	PHOTO DOCUMENTATION.....	11

Prüfbericht-Nr.: 50354677-001  
Test Report No.: 50354677-001

Seite 4 von 11  
Page 4 of 11

## 1 PRODUCT INFORMATION

The device under test (DUT) is a Smoke alarm for LoRaWAN Certification testing

General information	
Product name:	GS529-H03, GS529A
Model:	GS529-H03, GS529A
Description:	LoRa Alliance LoRaWAN compliance testing
Manufacturer SKU	-
Hardware version:	A1
Firmware version:	v3.1.1
Contact person:	Cynthia Xia
Phone number:	+86-574 87729575

LoRaWAN information	
Type of DUT	End Device
LoRa Device Class	A
Geographical area of operation	Europe
Operating frequency	868 MHz
Adaptive Data Rate (ADR) supported?	Yes
Optional data rates supported?	DR6 (SF7BW250) and DR7 (FSK50)
Activation possibilities	Both Over the air and by personalization
Test According LoRaWAN™ Spec	V1.0.2
Output Power	14dBm
Number / Type of Antenna(s)	1
Antenna Gain	-2 dBi
Test sample information	production unit

Prüfbericht-Nr.: 50354677-001  
Test Report No.: 50354677-001

Seite 5 von 11  
Page 5 of 11

<b>For OTA activation:</b>	
Sample No of Device with OTAA	A001068886-001
End-device identifier (DevEUI)	8CF9572000010C32
Application identifier (AppEUI)	8CF9572000000000
Application key (AppKey)	2B7E151628AED2A6ABF7158809CF4F3C
<b>For activation by personalization:</b>	
Sample No of Device with ABP	A001068886-001
End-device identifier (DevAddr)	00010C32
Application identifier (AppSKey)	2B7E151628AED2A6ABF7158809CF4F3C
Application key (NwksKey)	2B7E151628AED2A6ABF7158809CF4F3C
Default RX2 Window Frequency	869.525MHz
Default RX2 Window Data Rate	DR0 (SF12, 125kHz)
RECEIVE_DELAY1	1 s
RECEIVE_DELAY2	2 s (must be RECEIVE_DELAY1 + 1s)
JOIN_ACCEPT_DELAY1	5 s
JOIN_ACCEPT_DELAY2	6 s
MAX_FCNT_GAP	16384
ADR_ACK_LIMIT	63
ADR_ACK_DELAY	32
ACK_TIMEOUT	2 +/- 1 s (random delay between 1 and 3 seconds)

### Submitted Documents:

LoRa Certification Customer Questionnaire document.  
LoRa Test Environment log files.

### Remarks:

All test cases are tested with Activation by Personalization (ABP) mode, else explicitly Over the Air (OTA) to be tested.

Prüfbericht-Nr.: 50354677-001  
Test Report No.: 50354677-001

Seite 6 von 11  
Page 6 of 11

## 2 TEST EQUIPMENT

<b>Prüfmittel</b> <i>Test equipment</i>	<b>Marke</b> <i>Brand</i>	<b>Version</b> <i>Version</i>
Comprehensive Testing Environment (CTE)	4ffcom AG	CTE - TMF V46.1 CTE - SIG - LoRa V3.3
Semtech Development Kit (Semtech Gateway) for EU 863-870 Band	Semtech	SX1301-based concentrator reference design >=GW_V_3.1.0
Semtech Development Kit (Semtech Packet Forwarder) for EU 863-870 Band	Semtech	>= PF_V_2.2.0

Prüfbericht-Nr.: 50354677-001  
Test Report No.: 50354677-001

Seite 7 von 11  
Page 7 of 11

### 3 SUMMARY

Verdicts of functional requirements:	Verdict
Device Activation (Activation by Personalization)	PASS
Device Activation (Over the Air Activation)	PASS
Test Application Functionality	PASS
Over The Air Activation	PASS
Packet Error Rate RX2 default DR	PASS
Cryptography	PASS
Downlink Window Timing	PASS
Frame Sequence Number	PASS
Device Status Request MAC command	PASS
Mac Commands	PASS
New Channel Request MAC command	PASS
DIChannelReq MAC command	PASS
Confirmed packets	PASS
RX Parameter Setup Request MAC command	PASS
RX Timing Setup Request MAC command	PASS
Link ADR Request MAC command	PASS
Packet Error Rate RX1 Window	PASS
Packet Error Rate RX2 Window	PASS

Supported optional features:	YES / NO
Adaptive Data Rate (ADR)	YES
SF7BW250	YES
FSK	YES

**Overall Test Result: PASS**

## 4 TEST CASE VERIDCTS AS PER TEST SPECIFICATIONS

### Test results per test case (OTAA):

Test item	Description	Implementation	Result
EU863-870 2.1	Device Activation	Mandatory	PASS
EU863-870 2.2	Test application functionality	Mandatory	PASS
EU863-870 2.3	Over The Air Activation	Mandatory	PASS
EU863-870 2.4	Packet Error Rate RX2 Default DR	Mandatory	PASS
EU863-870 2.5	Cryptography	Mandatory	PASS
EU863-870 2.5.a	AES encryption	Mandatory	PASS
EU863-870 2.5.b	MIC	Mandatory	PASS
EU863-870 2.6	Downlink window timing	Mandatory	PASS
EU863-870 2.7	Frame sequence number	Mandatory	PASS
EU863-870 2.7.a	Uplink sequence number	Mandatory	PASS
EU863-870 2.7.b	Downlink sequence number	Mandatory	PASS
EU863-870 2.8	DevStatusReq MAC command	Mandatory	PASS
EU863-870 2.9	MAC Commands	Mandatory	PASS
EU863-870 2.10	New Channel Request	Mandatory	PASS
EU863-870 2.10.a	Read-only default channels	Mandatory	PASS
EU863-870 2.10.b	Addition and removal of multiple channels	Mandatory	PASS
EU863-870 2.10.c & 10.d	Addition and removal of a single channel	Mandatory	PASS
EU863-870 2.11	DL Channel Request MAC command	Mandatory	PASS
EU863-870 2.12	Confirmed packets	Mandatory	PASS
EU863-870 2.12.a	Uplink confirmed packets	Mandatory	PASS
EU863-870 2.12.b	Uplink retransmission	Mandatory	PASS
EU863-870 2.12.c	Downlink confirmed packets	Mandatory	PASS
EU863-870 2.12.d	Downlink retransmission	Mandatory	PASS
EU863-870 2.13	RXParamSetupReq MAC command	Mandatory	PASS
EU863-870 2.14	RXTimingSetupReq MAC command	Mandatory	PASS
EU863-870 2.15	Link ADR Request	Mandatory	PASS
EU863-870 2.15.a	ADR bit	Mandatory	PASS
EU863-870 2.15.b	TXPower	Mandatory	PASS
EU863-870 2.15.c	Required DataRates	Mandatory	PASS
EU863-870 2.15.d	Optional DataRates	Mandatory	PASS
EU863-870 2.15.e	ChannelMask	Mandatory	PASS
EU863-870 2.15.f	Redundancy	Mandatory	PASS
EU863-870 2.15.g	ADRACKReq bit	Mandatory	PASS
EU863-870 2.15.h	LinkADRReq commands block	Mandatory	PASS
EU863-870 2.16	Packet Error Rate RX1	Mandatory	PASS
EU863-870 2.17	Packet Error Rate RX2	Mandatory	PASS



Prüfbericht-Nr.: 50354677-001  
Test Report No.: 50354677-001

Seite 9 von 11  
Page 9 of 11

### Test results per test case (ABP):

Test item	Description	Implementation	Result
EU863-870 2.1	Device Activation	Mandatory	PASS
EU863-870 2.2	Test application functionality	Mandatory	PASS
EU863-870 2.3	Over The Air Activation	Mandatory	PASS
EU863-870 2.4	Packet Error Rate RX2 Default DR	Mandatory	PASS
EU863-870 2.5	Cryptography	Mandatory	PASS
EU863-870 2.5.a	AES encryption	Mandatory	PASS
EU863-870 2.5.b	MIC	Mandatory	PASS
EU863-870 2.6	Downlink window timing	Mandatory	PASS
EU863-870 2.7	Frame sequence number	Mandatory	PASS
EU863-870 2.7.a	Uplink sequence number	Mandatory	PASS
EU863-870 2.7.b	Downlink sequence number	Mandatory	PASS
EU863-870 2.8	DevStatusReq MAC command	Mandatory	PASS
EU863-870 2.9	MAC Commands	Mandatory	PASS
EU863-870 2.10	New Channel Request	Mandatory	PASS
EU863-870 2.10.a	Read-only default channels	Mandatory	PASS
EU863-870 2.10.b	Addition and removal of multiple channels	Mandatory	PASS
EU863-870 2.10.c & 10.d	Addition and removal of a single channel	Mandatory	PASS
EU863-870 2.11	DL Channel Request MAC command	Mandatory	PASS
EU863-870 2.12	Confirmed packets	Mandatory	PASS
EU863-870 2.12.a	Uplink confirmed packets	Mandatory	PASS
EU863-870 2.12.b	Uplink retransmission	Mandatory	PASS
EU863-870 2.12.c	Downlink confirmed packets	Mandatory	PASS
EU863-870 2.12.d	Downlink retransmission	Mandatory	PASS
EU863-870 2.13	RXParamSetupReq MAC command	Mandatory	PASS
EU863-870 2.14	RXTimingSetupReq MAC command	Mandatory	PASS
EU863-870 2.15	Link ADR Request	Mandatory	PASS
EU863-870 2.15.a	ADR bit	Mandatory	PASS
EU863-870 2.15.b	TXPower	Mandatory	PASS
EU863-870 2.15.c	Required DataRates	Mandatory	PASS
EU863-870 2.15.d	Optional DataRates	Mandatory	PASS
EU863-870 2.15.e	ChannelMask	Mandatory	PASS
EU863-870 2.15.f	Redundancy	Mandatory	PASS
EU863-870 2.15.g	ADRACKReq bit	Mandatory	PASS
EU863-870 2.15.h	LinkADRRReq commands block	Mandatory	PASS

Prüfbericht-Nr.: 50354677-001  
Test Report No.: 50354677-001

Seite 10 von 11  
Page 10 of 11

## 5 TEST RESULTS

### Detailed test results (OTAA):

Test item	Test Case Name	DataRate/ Timing	Limit	Results	Verdict
EU863-870 2.4	Packet Error Rate RX2 Default DR	SF12BW125	5%	0.00%	PASS
EU863-870 2.6	Downlink window timing	-20ms	-	-	PASS
		+20ms	-	-	PASS
EU863-870 2.16	Packet Error Rate RX1	SF12BW125	5%	0.00%	PASS
		SF11BW125	5%	0.00%	PASS
		SF10BW125	5%	0.00%	PASS
		SF9BW125	5%	0.00%	PASS
		SF8BW125	5%	0.00%	PASS
		SF7BW125	5%	0.00%	PASS
		SF7BW250	5%	0.00%	PASS
		FSK 50kbps	5%	0.00%	PASS
EU863-870 2.17	Packet Error Rate RX2	SF11BW125	5%	1.67%	PASS
		SF10BW125	5%	3.33%	PASS
		SF9BW125	5%	1.67%	PASS
		SF8BW125	5%	0.00%	PASS
		SF7BW125	5%	1.67%	PASS
		SF7BW250	5%	1.67%	PASS
		FSK 50kbps	5%	0.00%	PASS

Prüfbericht-Nr.: 50354677-001  
Test Report No.: 50354677-001

Seite 11 von 11  
Page 11 of 11

## 6 PHOTO DOCUMENTATION

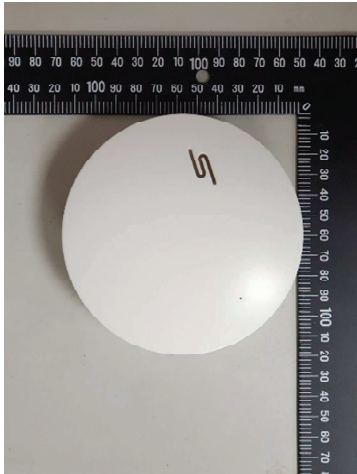


Photo 1: EUT front view



Photo 2: EUT rear view