

LoRa accredited Test Lab



Test report No:

NIE: 70239RLR.001

Test report

LoRa Alliance End Device Certification Requirements

(*) Identification of item tested	P3B2/TM-2016
(*) Trademark	Kolff Computer Supplies BV
(*) Model and /or type reference tested	TM-2016
(*) Other identification of the product	Final HW version: P3B2 Final FW Version: 0.3001
(*) Features	Class A, DICHannelReq and block of LinkADRReq Commands processing are supported. Brief description of the tested product.
Manufacturer	Kolff Computer Supplies BV Address: Kuipershaven 22 Postal code, City: 3311AL, Dordrecht Netherlands
Test method requested, standard	Lora Alliance Certification Program
Standard.....:	LoRaWAN v1.0.2
Test Specification.....:	End Device Certification EU863-870 V1.6
LoRa_Certification_Questionnaire.....:	LoRaWAN_Certification_Questionnaire_V2.2
Test procedure(s).....:	PELR000_00 LoRa Alliance Testing Procedure
Supported Optional Features	
Adaptive Data Rate (ADR).....:	Yes
SF7BW250.....:	No
FSK50	No
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Noemí Pérez Dans IoT Lab. Manager
Date of issue	2022-04-28
Report template No	FLR001_05 (* "Data provided by the client")

Index

Competences and guarantees	3
General conditions	3
Uncertainty	4
Data provided by the client.....	4
Usage of samples	4
Test sample description	4
Identification of the client.....	4
Testing period and place.....	5
Document history	5
Remarks and comments	5
Means of testing identification	5
Test setup	6
Testing verdicts.....	6
Appendix A: Test results	7
Appendix B: ICS	9
Appendix C: Photographs	10

Competences and guarantees

DEKRA Testing and Certification S.A.U is a LoRa Alliance accredited Test Lab competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

N/A

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of item tested ", "Trademark", "Model and /or type reference tested", "Derived model not tested", "Other identification of the product", "Features" and "Test Sample Description").
2. The ICS provided by the customer via the LoRa_Certification_Questionnaire_V2.2 and used for testing are indicated in Annex B.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: Kolff Computer Supplies BV

Sample M/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
70329B/007	End Device/Sensor	TM-2016	-	2022-02-03
Firmware version 0.3001				

1. Sample M/01 has undergone the test(s) specified in subclause "Test method requested".

Test sample description

The KCS TM-2016 is an advanced LoRa-based module, targeted for tracking and tracing a variety of non-powered movable assets.

The module offers excellent indoor and outdoor traceability, by using LoRa and amplified 2.4GHz RF-technology, including Wi-Fi positioning.

With a minimal size of 50 x 26 mm, optional robust IP68 housing and a battery lifespan of up to 10 years, the module offers OEM integration possibilities into a variety of IoT applications.

Identification of the client

Kolff Computer Supplies BV
Address: Kuipershaven 22
Postal code, City: 3311AL, Dordrecht
Netherlands

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2022-04-18
Date (finish)	2022-04-20

Document history

Report number	Date	Description
70239RLR.001	2022-04-28	First release (test report without logs to be uploaded to the public area of LoRa Alliance website)
70239RLR.002	2022-04-28	Identical test report as '70239RLR.001' with the addition of the test logs

Remarks and comments


Testing was performed by: Martín Sánchez Revuelta

Means of testing identification

TEST SYSTEM	BANCO LORA V1.0.2 (EU / AS / IN / KR)		
Control Number	5866		
Control PC	Control No.	Equipment	Serial No.
	7218	Control PC with LCTT version v2.0.0 and Technology Packet Version v3.5.0_R1	-
LoRa Gateway	7342	Semtech GW	-
LoRa Gateway	9262	Semtech CoreCell GW	-
RF Shielded box	5387	RF Shielded Test Enclosure	0001114
Test Setup:	See "Test Setup" section.		

Test setup

This Test Setup has been used for testing:

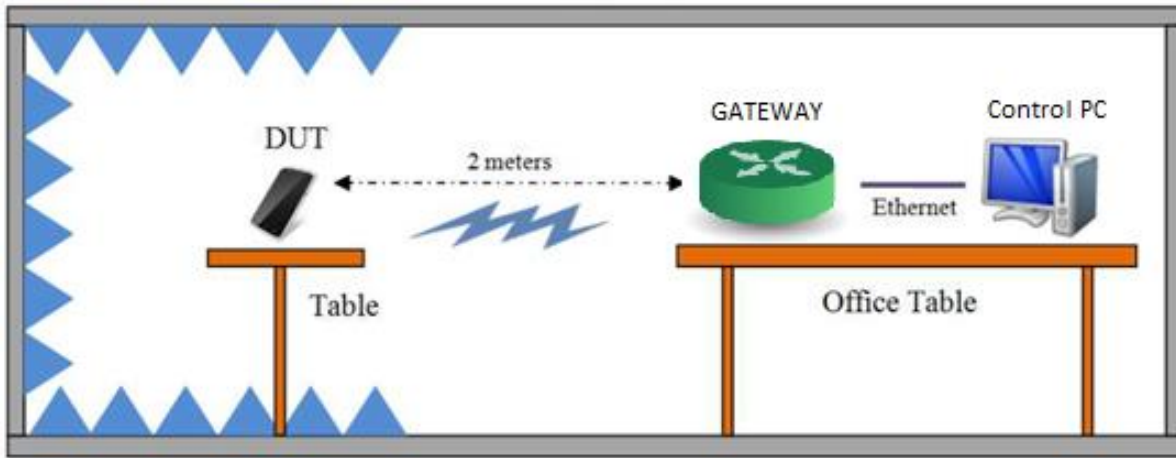

Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

Appendix A: Test results

Test campaign report

The abbreviations used in the header row of the test campaign report tables are:

Test Case ID :	As it can be found on the standard
Verdict:	Records the verdict assigned to each Test Case run to completion (<u>Testing verdicts</u>)
Date:	Date of the beginning of the execution.
Observations:	Provides a reference to additional information relevant to the test presented in “Test Setup” section.
Logs:	See 70239RLR.002

Test Case ID	Description	Date	Verdict	Observations
TP_A_EU868_ED_MAC_BV_000 (ABP)	Device Activation (ABP)	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_000 (OTA)	Device Activation (OTA)	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_001_A	Over The Air Activation	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_001_B	Activation by Personalization	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_002	Test application functionality	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_003	AES encryption and message integrity	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_004	Downlink error rate	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_005	Downlink window timing	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_006	Frame sequence number	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_007	DevStatusReq MAC command	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_008	MAC commands	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_009	NewChannelReq MAC command	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_010	DlChannelReq MAC command	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_011	Confirmed packets	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_012	RXParamSetupReq MAC command	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_013	RXTimingSetupReq MAC command	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_014_A	LinkADRRReq MAC command Part 1	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_014_B	LinkADRRReq MAC command Part 2	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_015_A	RX1 Receive window test (Part 1)	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_015_B	RX1 Receive window test (Part 2)	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_016	RX2 Receive window test	18/04/2022	P	
TP_A_EU868_ED_MAC_BV_017	RX1 and RX2 simultaneous frames	18/04/2022	P	

TP_A_EU868_ED_MAC_BV_018	TXParamSetupReq MAC command	18/04/2022	P
TP_A_EU868_ED_MAC_BV_019	LinkCheckReq MAC command	18/04/2022	P
TP_A_EU868_ED_MAC_BV_020	RX Oversized payload	18/04/2022	P
TP_A_EU868_ED_MAC_BV_021	Maximum Allowed Payload	20/04/2022	P

Appendix B: ICS

Implementation Conformance Statement (ICS)

Name	Title	Groupname	Mandatory	Value
C_ISM_AS923	DUT works in Asia 923MHz ISM Band	BAND	C	False
C_ISM_AU915	DUT works in Australia 915MHz ISM Band	BAND	C	False
C_ISM_EU868	DUT works in EU 868MHz ISM Band	BAND	C	True
C_ISM_IN865	DUT works in India 865-867 MHz ISM Band	BAND	C	False
C_ISM_KR920	DUT works in South Korea 920MHz ISM Band	BAND	C	False
C_ISM_RU864	DUT works in Rusia 864MHz ISM Band	BAND	C	False
C_ISM_US915	DUT works in USA 915MHz ISM Band	BAND	C	False
C_CERT_102rB	DUT implements LoRaWAN v1.0.2rB certification requirements	CERT	C	True
C_CERT_104	DUT implements LoRaWAN v1.0.4 certification requirements	CERT	C	False
C_CLASS_A	DUT is a Class A Device (All End Devices)	CLASS	C	True
C_CLASS_B	DUT is a Class B Device (Beacon Mode)	CLASS	C	False
C_CLASS_C	DUT is a Class C Device (Continuously Listening)	CLASS	C	False
C_ED_ADR	DUT supports Adaptive Data Rate (ADR) feature	ED	C	True
C_ED_ADR_BLOCK	DUT supports LinkADRReq block	ED	C	True
C_ED_DL_CHAN	DUT supports DChannelReq MAC command	ED	C	True
C_ED_CONFIRMED_FRAME_RETRANSMIT	DUT supports uplink re-transmissions for Confirmed frames	ED	C	False
C_ED_JOIN_ISSUES_REMEDIES_RETRANSMIT	DUT supports the LoRawan-1.0.x-join-synch-issues-remedies-v1.0.0	ED	C	False
C_ED_OTAA	DUT supports Over-The-Air Activation (OTAA) mechanism	ED	C	True
C_ED_PERMANENT_CLASS_C	DUT permanently enabled Class C	ED	C	False
C_ED_AS923_GROUP1	DUT Works in Asia 923MHz ISM Band Group 1	ED	C	False
C_ED_AS923_GROUP2	DUT Works in Asia 923MHz ISM Band Group 2	ED	C	False
C_ED_AS923_GROUP3	DUT Works in Asia 923MHz ISM Band Group 3	ED	C	False
C_ED_AS923_GROUP4	DUT Works in Asia 923MHz ISM Band Group 4	ED	C	False
C_ED_RESET	DUT needs a reset after deactivating Test Mode	ED	C	False
C_ED_TM_TRI	DUT supports Trigger Join Request command in Test Mode	ED	C	True

Appendix C: Photographs

Front view



Rear view

