



The Testcenter facility 'LoRa[®] Test Lab' within IMST GmbH is recognized by the LoRa[®] Alliance for testing in accordance to the LoRaWAN[®] Specification V1.0.4

Report for Test of Conformance to LoRaWAN[®] V1.0.4 Class A (US915)

for the Device

“Stealth Reader Meter Interface Unit
(GAS)”

for the Customer

“Zenner USA”

Jens Lerner
Yavuz Turan

23rd October, 2023

Administrative Summary

Location: IMST GmbH, Test Centre, Kamp-Lintfort, Germany

Responsible Test Engineer: Yavuz Turan, Jens Lerner

Subject: Test of Conformance to LoRaWAN® Specification V1.0.4 (Class A for US915)

Company and Contact Information:

Zenner USA

Ralph Stillinger

15280 Addison Rd, Suite 240

Addison Texas 75001

USA

Tested Device: Stealth Reader Meter Interface Unit (GAS)

Product Version: WM3

Hardware Version: GM3: Revision B

Firmware Version: 3.4.56

End-device identifier: 04b648a00000d431

LoRaWAN® Device Class: A

LoRaWAN Specification version: V1.0.4

Certification requirements: LoRaWAN 1.0.4 End Device Certification Requirements for All Regions Version 1.6

Frequency band(s) tested: 915 MHz

Test Equipment: LCTT v3.11.0_R1

8x IMST LGW (iC980A + Raspberry Pi): Gateway software version 4.1.3

Packet forwarder software version 3.1.0

Test Result: PASS

Quality Engineer: Jens Lerner

Date: October 23rd, 2023

The Test Report, No. 6230097 has the following conclusion:

The device has PASSED the tests hereunder.

Responsibility:  Approved: 
Yavuz Turan Jens Lerner
Test Engineer Quality Engineer

Copyright Notice & Disclaimer: No part of this test report may be reproduced without written permission of IMST GmbH. The test results herein only refer to the tested sample. IMST GmbH cannot be made responsible for any generalizations or conclusions drawn from the test results presented herein concerning further samples of the tested device. Modification of the tested sample(s) is prohibited and leads to invalidity of this report.

1 Description of the Device Under Test (DUT)

1.1 General

Item	Value
Product name	Stealth Reader Meter Interface Unit (GAS)
Product Vertical(s)	Utilities
Series (if any)	Series 3
Hardware Version	GM3: Revision B
Firmware Version	3.4.56
LoRaWAN® Device Class	A
Type of DUT	<input type="checkbox"/> Module <input checked="" type="checkbox"/> End Device/Sensor <input type="checkbox"/> others
Geographical area of operation	<input type="checkbox"/> Europe <input checked="" type="checkbox"/> USA <input type="checkbox"/> Australia
Operating frequency	<input type="checkbox"/> 433 MHz <input type="checkbox"/> 868 MHz <input checked="" type="checkbox"/> 915 MHz
Adaptive Data Rate (ADR) supported?	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Optional data rates supported?	<input type="checkbox"/> DR6 <input type="checkbox"/> DR7
Activation possibilities	<input checked="" type="checkbox"/> Over the air <input type="checkbox"/> by personalization <input type="checkbox"/> both
Test According LoRaWAN® Spec	<input type="checkbox"/> V1.0.1 <input type="checkbox"/> V1.0.2 <input checked="" type="checkbox"/> V1.0.4
Output Power	4uA-500mA
Number / Type of Antenna(s)	Fixed internal helical
Antenna Gain	N/A

Table 1 Device Information

1.2 DUT Modes of Operation

During the tests the device operated in the following modes:

- Test mode according to document “LoRa Alliance End Device certification Requirements for All Regions Version 1.6” Chapter 2.

1.3 DUT Setup

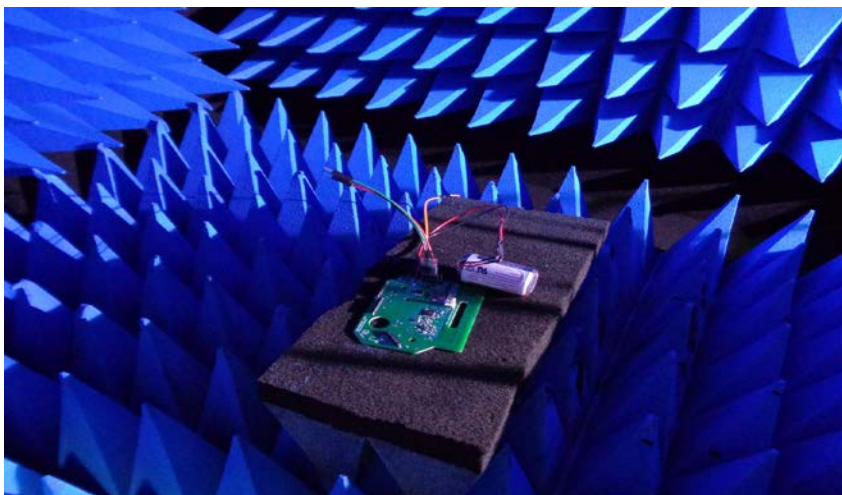


Figure 1 DUT Setup

Applied Methods of Measurement

1.4 Protocol Testing according to LoRaWAN® specification V1.0.4 (Class A device for US915)

Detailed Test Results:

Test Mode Activation: **PASS**
Over the Air Activation: **PASS**
Cryptography: **PASS**
Downlink Sequence Number: **PASS**
Confirmed Frames: **PASS**
Device Status Request: **PASS**
New Channel Request Reject: **PASS**
Di Channel Request Reject: **PASS**
RX Parameter Setup Request: **PASS**
RX Timing Setup Request: **PASS**
TX Parameter Setup Request: **PASS**
Link Check Request: **PASS**
Link ADR Request: **PASS**
Duty Cycle Request: **PASS**
Device Time Request: **PASS**
RX1 Window Test: **PASS**
RX2 Window Test: **PASS**
RX1 and RX2 Simultaneous Frames: **PASS**
RX Oversized Payload: **PASS**
Maximum Allowed Payload: **PASS**
Mac Commands: **PASS**
Multiple MAC Commands Prioritization: **PASS**
Device Deactivation: **PASS**
Retransmission Back-Off for OTAA device only: **PASS**

Supported Optional Features:

Adaptive Data Rate (ADR):	Yes
Permanent Class C	No

Remarks: None

Result: The device passed the test without limitations.