

LoRa accredited Test Lab



Test report No:

NIE: 72430RLR.002

Test report

LoRa Alliance End Device Certification Requirements

(*) Identification of item tested	Honeywell Versatilis™ Transmitter
(*) Trademark	Honeywell International Inc.
(*) Model and /or type reference tested	HVT100-XXX,XXX-X-XX-X-X-0000
(*) Other identification of the product	Final HW version: Rev A Final FW Version: 1.0.30
(*) Features	EU863-870 MHz, Class A, brief description of the tested product.
Manufacturer	Honeywell International Inc. 512 Virginia Dr. Fort Washington, Pennsylvania. 19034. USA
Test method requested, standard	Lora Alliance Certification Program
Standard.....:	LoRaWAN v1.0.4
Test Specification.....:	LoRa Alliance End-Device Certification Requirements for All Regions
LoRa_Certification_Questionnaire.....:	LoRaWAN_Certification_Questionnaire_V2.4
Test procedure(s).....:	PELR000_00 LoRa Alliance Testing Procedure
Supported Optional Features	
Adaptive Data Rate (ADR).....:	Yes
SF7BW250.....:	No
FSK50	No
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Noemí Pérez Dans
Date of issue	2023-03-02
Report template No	FLR001_05 (* "Data provided by the client"

Index

Competences and guarantees	3
General conditions	3
Uncertainty	4
Data provided by the client.....	4
Usage of samples	4
(*)Test sample description	4
Identification of the client.....	4
Testing period and place.....	5
Document history	5
Remarks and comments	5
Means of testing identification	5
Test setup	6
Testing verdicts.....	6
Appendix A: Test results	7
Appendix B: ICS	9
Appendix C: Photographs	10

Competences and guarantees

DEKRA Testing and Certification S.A.U is a LoRa Alliance accredited Test Lab competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

N/A

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of item tested ", "Trademark", "Model and /or type reference tested", "Derived model not tested", "Other identification of the product", "Features" and "Test Sample Description").
2. The ICS provided by the customer via the LoRa_Certification_Questionnaire_V2.4 and used for testing are indicated in Annex B.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: Honeywell International Inc.

Sample M/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
72430/004	Honeywell Versatilis™ Transmitter	HVT100-XXX,XXX-X-XX-X-X-0000	101XX00019	2023-02-09
	FW version 1.0.30			2023-02-09

1. Sample M/01 has undergone the test(s) specified in subclause "Test method requested".

(*)Test sample description

Honeywell Versatilis™ Transmitter is a multi-variant sensing platform based on the latest LoRaWAN® technology, Battery powered and can be easily installed. These sensors are designed to monitor and predict the health of rotating equipment like motors, pumps, blowers, fans, compressors, and gearboxes. Measurement parameters include Surface Temperature, Audio Acoustics, Vibration, Ambient – Temperature, Pressure & Humidity.

Identification of the client

Honeywell International Inc.

Address: 512, Virginia Dr.

Postal code, City: 19034, Fort Washington, Pennsylvania

Country: United States of America

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2023-02-13
Date (finish)	2023-02-14

Document history

Report number	Date	Description
72430RLR.001	2023-03-02	First release (test report without logs)
72430RLR.002	2023-03-02	Identical test report than 72430RLR.001 but without device's pictures (to be uploaded to the public area of LoRa Alliance website)

Remarks and comments

Testing was performed by: Martín Sánchez Revuelta

Comments: The sample was provided with a pair of wires in order to power it using Dekra's power source instead of the batteries. This decision was made to avoid shipment issues regarding batteries. This power wires are not present on the end product, but battery is. *See Appendix C.*


Means of testing identification

DEKRA Authorized Test Lab used the approved test environment recipe for their certification test results as follows:

LCTT GUI version	LCTT Test Cases Package Version	DUT inside RF Chamber	Gateways model
V2.5.0	V3.9.0_R1	Yes	2 x Corecell SX1302C868GW1

Test setup

This Test Setup has been used for testing:

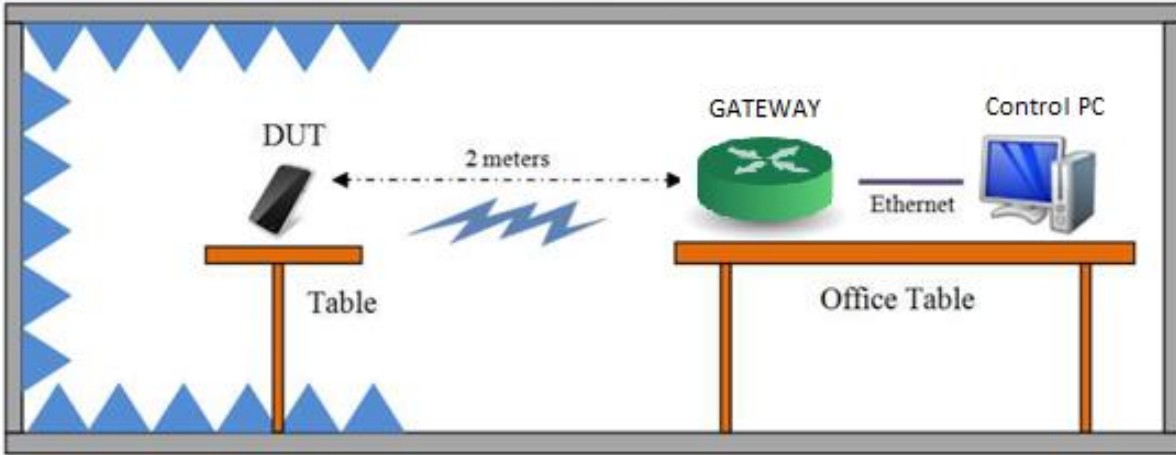

Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

Appendix A: Test results

Test campaign report

The abbreviations used in the header row of the test campaign report tables are:

Test Case ID :	As it can be found on the standard
Verdict:	Records the verdict assigned to each Test Case run to completion (<u>Testing verdicts</u>)
Date:	Date of the beginning of the execution.
Observations:	Provides a reference to additional information relevant to the test presented in “Test Setup” section.
Logs:	<i>Shared via FTP</i>

Test Case ID	Description	Date	Verdict	Observations
TP_A_EU868_ED_MAC_104_BV_000 (ABP)	Activation Pre-test	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_000 (OTA)	Activation Pre-test	14/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_001_A	Over The Air Activation	14/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_001_B	Activation by Personalization	14/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_002	Cryptography	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_003	Downlink Sequence Number	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_004	Confirmed Frames	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_005	DevStatusReq MAC command	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_006	NewChannelReq MAC command for Dynamic Channel plan devices only	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_007	DIChannelReq for Dynamic Channel plan devices only	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_008	RXParameterSetupReq MAC command	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_009	RXTimingSetupReq MAC command	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_010	TxParamSetupReq MAC command	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_011	LinkCheckReq MAC command	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_012_A	LinkADDRReq MAC command (Part 1)	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_012_B	LinkADDRReq MAC command (Part 2)	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_013	DutyCycleReq MAC Command	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_014	DeviceTimeReq MAC Command	13/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_015_A	RX1 Window Test (Part 1)	14/02/2023	P	
TP_A_EU868_ED_MAC_104_BV_015_B	RX1 Window Test (Part 2)	13/02/2023	P	

TP_A_EU868_ED_MAC_104_BV_016	RX2 Receive Window Test	13/02/2023	P
TP_A_EU868_ED_MAC_104_BV_017	RX1 and RX2 simultaneous frames	13/02/2023	P
TP_A_EU868_ED_MAC_104_BV_018	RX Oversized Payload	13/02/2023	P
TP_A_EU868_ED_MAC_104_BV_019_A	Maximum Allowed Payload (Part 1)	13/02/2023	P
TP_A_EU868_ED_MAC_104_BV_019_B	Maximum Allowed Payload (Part 2)	13/02/2023	P
TP_A_EU868_ED_MAC_104_BV_020	MAC Command(s) in App-Payload and/or Frame Options	13/02/2023	P
TP_A_EU868_ED_MAC_104_BV_021	Multiple MAC commands prioritation	13/02/2023	P
TP_A_EU868_ED_MAC_104_BV_022	FPort 224 Deactivation	14/02/2023	P

Appendix B: ICS

Implementation Conformance Statement (ICS)

Name	Title	Groupname	Mandatory	Value
C_ISM_AS923	DUT works in Asia 923MHz ISM Band	BAND	-	FALSE
C_ISM_AU915	DUT works in Australia 915MHz ISM Band	BAND	-	FALSE
C_ISM_EU868	DUT works in EU 868MHz ISM Band	BAND	-	TRUE
C_ISM_IN865	DUT works in India 865-867 MHz ISM Band	BAND	-	FALSE
C_ISM_KR920	DUT works in South Korea 920MHz ISM Band	BAND	-	FALSE
C_ISM_RU864	DUT works in Rusia 864MHz ISM Band	BAND	-	FALSE
C_ISM_US915	DUT works in USA 915MHz ISM Band	BAND	-	FALSE
C_CERT_102rB	DUT implements LoRaWAN v1.0.2rB certification requirements	CERT	-	FALSE
C_CERT_104	DUT implements LoRaWAN v1.0.4 certification requirements	CERT	-	TRUE
C_CLASS_A	DUT is a Class A Device (All End Devices)	CLASS	-	TRUE
C_CLASS_B	DUT is a Class B Device (Beacon Mode)	CLASS	-	FALSE
C_CLASS_C	DUT is a Class C Device (Continuously Listening)	CLASS	-	FALSE
C_ED_ADR	DUT supports Adaptive Data Rate (ADR) feature	ED	-	TRUE
C_ED_ADR_BLOCK	DUT supports LinkADRReq block	ED	-	FALSE
C_ED_AS923_GROUP1	DUT works in Asia 923MHz ISM Band Group 1	ED	-	FALSE
C_ED_AS923_GROUP2	DUT works in Asia 923MHz ISM Band Group 2	ED	-	FALSE
C_ED_AS923_GROUP3	DUT works in Asia 923MHz ISM Band Group 3	ED	-	FALSE
C_ED_AS923_GROUP4	DUT works in Asia 923MHz ISM Band Group 4	ED	-	FALSE
C_ED_DL_CHAN	DUT supports DChannelReq MAC command	ED	-	FALSE
C_ED_DR_DECAY	DUT implements Data Rate Decay	ED	-	FALSE
C_ED_OTAA	DUT supports Over-The-Air Activation (OTAA) mechanism	ED	-	TRUE
C_ED_PERMANENT_CLASS_C	DUT permanently enabled Class C	ED	-	FALSE
C_ED_RESET	DUT needs a reset after deactivating Test Mode	ED	-	FALSE
C_ED_SCHC	DUT supports SCHC	ED	-	FALSE
C_ED_TM_TRI	DUT supports Trigger Join Request command in Test Mode	ED	-	TRUE

Appendix C: Photographs

Front view

N/A

Rear view

N/A