

LoRa accredited Test Lab



Test report No:  
 NIE: 65182RLR.001

## Test report

### LoRa Alliance End Device Certification Requirements

(*) Identification of item tested	TOPAS LW
(*) Trademark	INTEGRA METERING
(*) Model and /or type reference tested	TOPAS LW
Other identification of the product	HW version: 04A FW Version: V3.0
(*) Features	Adaptative Data Rate, Optional data rates SF7BW250 and FSK50, DIChannelReq.
Manufacturer	INTEGRA METERING 12 rue Font Grasse 31700 BLAGNAC. FRANCE
Test method requested, standard	Lora Alliance Certification Program
Standard.....:	LoRaWAN V1.0.2
Test Specification.....:	LoRaWAN® European EU 863-870MHz Region End Device Certification Requirements document V1.6
LoRa_Certification_Questionnaire.....:	LoRaWAN_Certification_Questionnaire_V1.2
Test procedure(s).....:	PELR000_00 LoRa Alliance Testing Procedure
Supported Optional Features	
Adaptive Data Rate (ADR).....:	Yes
SF7BW250.....:	Yes
FSK50 .....	Yes
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Noemí Pérez Dans IoT Lab. Manager
Date of issue	2021-05-31
Report template No	FLR001_04 (* "Data provided by the client")

# Index

Competences and guarantees .....	3
General conditions .....	3
Uncertainty .....	4
Data provided by the client.....	4
Usage of samples .....	4
Test sample description .....	4
Identification of the client.....	4
Testing period and place.....	5
Document history .....	5
Environmental conditions .....	5
Remarks and comments .....	5
Test setup.....	6
Testing verdicts.....	6
Appendix A: Test results .....	7
Appendix B: ICS .....	9
Appendix C: Photographs .....	10

## Competences and guarantees

---

DEKRA Testing and Certification S.A.U is a LoRa Alliance accredited Test Lab competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

## Uncertainty

---

N/A

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample "Identification of item tested", "Trademark", "Model and /or type reference tested", "Features" and "Test Sample Description".
3. The ICS provided by the customer via the LoRa Certification Questionnaire V2.1 and used for testing are indicated in Annex B.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

---

Samples undergoing test have been selected by: the client

Sample M/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
65182/011	Water meter with FW v3.0	-	-	2021-04-13

1. Sample M/01 has undergone the test(s) specified in subclause "Test method requested".

## Test sample description

---

Residential static water meter using ultrasonic free pipe technology. Certified for billing (MID) of potable water, ideal for remote data collection, leak detection, network efficiency management. Family of products covers DN15 to DN50 and offers a high measurement range (R500). 16 years of lifetime for product in operation with 2 LoraWAN uplinks per day.

## Identification of the client

---

INTEGRA METERING  
12 rue Font Grasse  
31700 Blagnac  
France

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-05-12
Date (finish)	2021-05-31

## Document history

Report number	Date	Description
65182RLR.001	2021-05-31	First release (test report without logs to be uploaded to the public area of LoRa Alliance website).
65182RLR.002	2021-05-31	Identical test report as '65182RLR.001' with the addition of the test logs.

## Environmental conditions

The following limits were not exceeded during the test:

Relative temperature	Min= 15 °C Max= 35 °C
Relative humidity	Min= 25 % Max= 75 %

## Remarks and comments

Testing was performed by: Daniel Ríos Toca and Martín Sánchez Revuelta


## Means of testing identification

TEST SYSTEM	BANCO LORA EU		
Control Number	5866		
Control PC	Control No.	Equipment	Serial No.
	7218	Control PC with TACS4 v2.0.0_R1 and Technology Packet Version LORA v.6.2.0_R1	-
LoRa Gateway	7342	Semtech GW	-
RF Shielded box	5387	RF Shielded Test Enclosure	0001114
Test Setup:	See "Test Setup" section.		

## Test setup

TS1: This Test Setup has been used for EU testing:

### SEMTECH EUROPEAN GATEWAY AND TACS4 LPWAN CONFIGURATION:

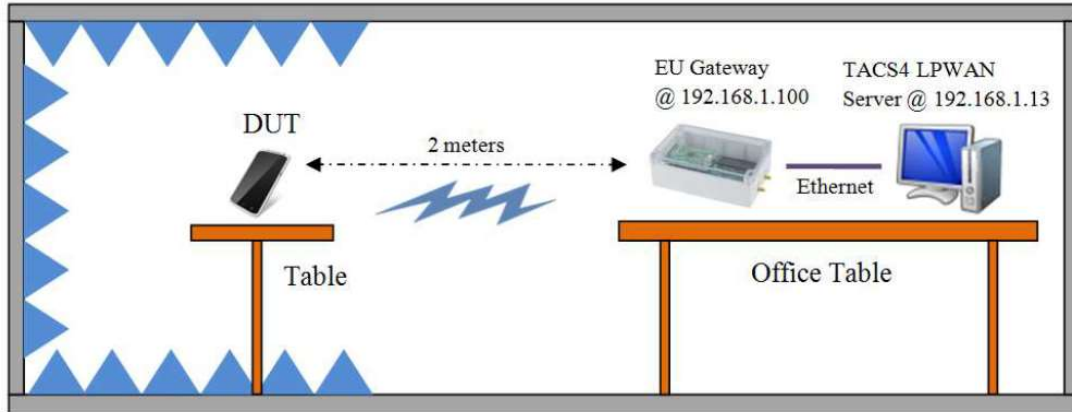

## Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

# Appendix A: Test results

## Test campaign report

The abbreviations used in the header row of the test campaign report tables are:

Test Case ID :	As it can be found on the standard
Verdict:	Records the verdict assigned to each Test Case run to completion ( <u>Testing verdicts</u> )
Date:	Date of the beginning of the execution.
Observations:	Provides a reference to additional information relevant to the test presented in “Test Setup” section.
Logs:	See 65182RLR.002

Test Case ID	Description	Date	Verdict	Observations
TP_A_EU868_ED_MAC_BV_000_A	Device activation (OTAA)	2021-05-12	P	M/01
TP_A_EU868_ED_MAC_BV_000_A	Device activation (ABP)	-	N/A	-
TP_A_EU868_ED_MAC_BV_001_A	Over The Air activation	2021-05-12	P	M/01
TP_A_EU868_ED_MAC_BV_001_B	Activation by Personalization	-	N/A	-
TP_A_EU868_ED_MAC_BV_002	Test application functionality	2021-05-12	P	M/01
TP_A_EU868_ED_MAC_BV_003	AES encryption and message integrity	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_004	Downlink error rate	2021-05-12	P	M/01
TP_A_EU868_ED_MAC_BV_005	Downlink window timing	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_006	Frame sequence number	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_007	DevStatusReq MAC command	2021-05-12	P	M/01
TP_A_EU868_ED_MAC_BV_008	MAC Commands	2021-05-28	P	M/01
TP_A_EU868_ED_MAC_BV_009	NewChannelReq MAC command	2021-05-28	P	M/01
TP_A_EU868_ED_MAC_BV_010	DIChannelReq MAC command	2021-05-28	P	M/01
TP_A_EU868_ED_MAC_BV_011	Confirmed packets	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_012	RXParamSetupReq MAC command	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_013	RXTimingSetupReq MAC command	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_014_A	LinkADRRReq MAC command (Part 1)	2021-05-31	P	M/01
TP_A_EU868_ED_MAC_BV_014_B	LinkADRRReq MAC command (Part 2)	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_015_A	RX1 Receive window test (Part 1)	2021-05-12	P	M/01
TP_A_EU868_ED_MAC_BV_015_B	RX1 Receive window test (Part 2)	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_016	RX2 Receive window test	2021-05-13	P	M/01

TP_A_EU868_ED_MAC_BV_017	RX1 and RX2 simultaneous frames	2021-05-12	P	M/01
TP_A_EU868_ED_MAC_BV_018	TXParamSetupReq MAC command	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_019	LinkCheckReq MAC command	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_020	RX Oversized payload	2021-05-13	P	M/01
TP_A_EU868_ED_MAC_BV_021	Maximum Allowed payload	2021-05-12	P	M/01

# Appendix B: ICS


## Implementation Conformance Statement (ICS)

Name	Title	Groupname	Mandatory	Value
C_ISM_AS923	DUT works in Asia 923MHz ISM Band	BAND	C	FALSE
C_ISM_AU915	DUT works in Australia 915MHz ISM Band	BAND	C	FALSE
C_ISM_EU868	DUT works in EU 868MHz ISM Band	BAND	C	TRUE
C_ISM_IN865	DUT works in India 865-867 MHz ISM Band	BAND	C	FALSE
C_ISM_KR920	DUT works in South Korea 920MHz ISM Band	BAND	C	FALSE
C_ISM_RU864	DUT works in Rusia 864MHz ISM Band	BAND	C	FALSE
C_ISM_US915	DUT works in USA 915MHz ISM Band	BAND	C	FALSE
C_CERT_101	DUT implements LoRaWAN v1.0.1 certification	CERT	C	FALSE
C_CERT_102rB	DUT implements LoRaWAN v1.0.2rB certification	CERT	C	TRUE
C_CERT_103rA	DUT implements LoRaWAN v1.0.3rA (Class B)	CERT	C	FALSE
C_CERT_104	DUT implements LoRaWAN v1.0.4 certification	CERT	C	FALSE
C_CLASS_A	DUT is a Class A Device (All End Devices)	CLASS	C	TRUE
C_CLASS_B	DUT is a Class B Device (Beacon Mode)	CLASS	C	FALSE
C_ED_ADR	DUT supports Adaptive Data Rate (ADR) feature	ED	C	TRUE
C_ED_ADR_BLOCK	DUT supports LinkADRRReq block	ED	C	TRUE
C_ED_CONFIRMED_FRAME_RET	DUT support uplink re-transmissions for Confirmed	ED	C	FALSE
C_ED_CW	DUT supports Continuous Wave command	ED	C	FALSE
C_ED_DL_CHAN	DUT supports DIChannelReq MAC command	ED	C	TRUE
C_ED_JOIN_ISSUES_REMEDIES_	DUT supports the Lorawan-1.0.x-join-synch-issues-	ED	C	FALSE
C_ED_OTAA	DUT supports Over-The-Air Activation (OTAA)	ED	C	TRUE
C_ED_RESET	DUT needs a reset after deactivating Test Mode	ED	C	TRUE
C_ED_TM_TRI	DUT supports Trigger Join Request command in Test	ED	C	TRUE

## Appendix C: Photographs


### Front view

---

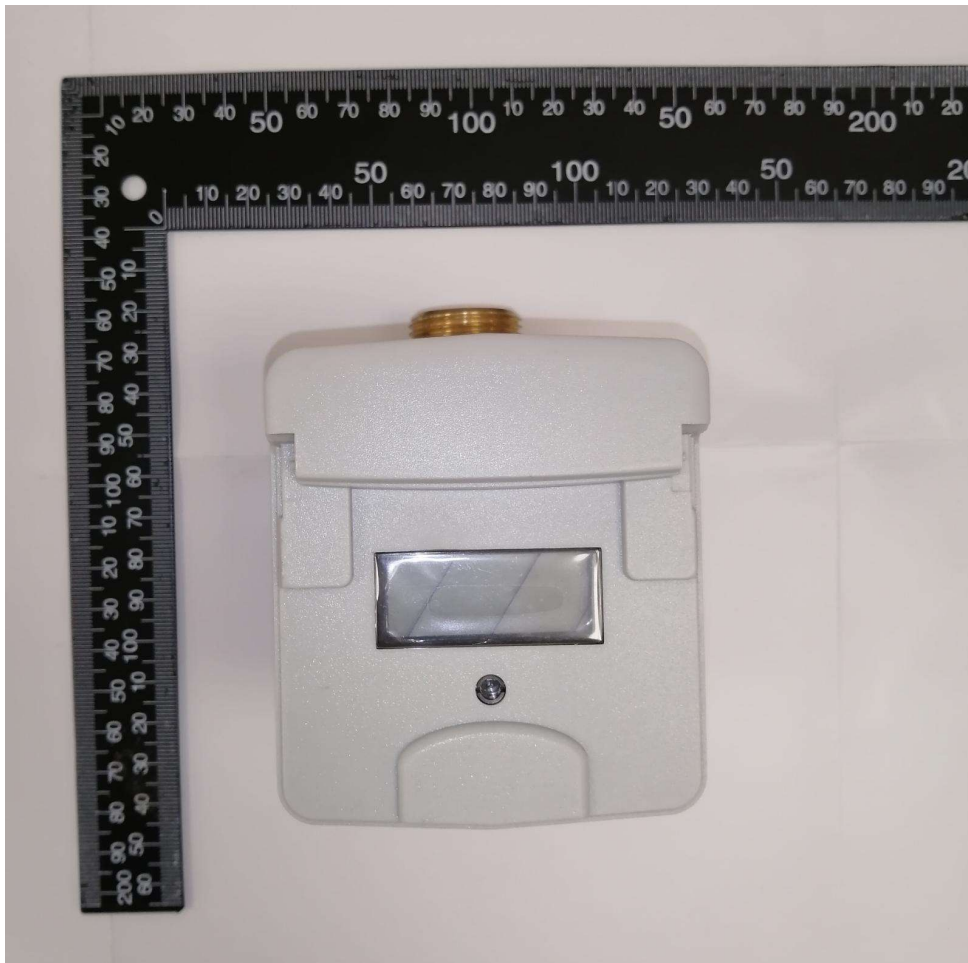

## Rear view

---

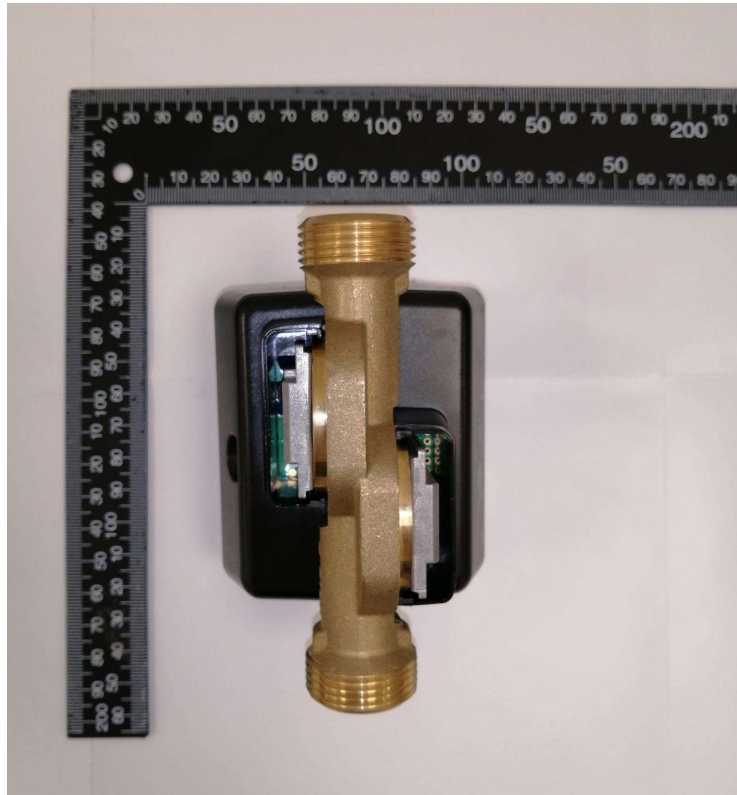

## Top view

---

