



Test report No:

2350246R-A332250010S-C

Test Report

LoRa Alliance End Device Certification Requirements

Product Name.....	LoRaWAN Module
Type of DUT	<input checked="" type="checkbox"/> Module <input type="checkbox"/> End Device/Sensor <input type="checkbox"/> others
Model Name.....	CMWX1ZZABZ-108
Activation possibilities	<input type="checkbox"/> Over the air <input type="checkbox"/> by personalization <input checked="" type="checkbox"/> both
Hardware Version.....	MP
Software Version.....	1.1.01
Firmware version.....	1.1.01
Manufacturer	Murata Manufacturing Co., Ltd. 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555, Japan
Test Method Request:	Lora Alliance Certification Program
Test Frequency Bands:	AS923
LoRaWAN Spec. Version	<input checked="" type="checkbox"/> V1.0.2 <input type="checkbox"/> V1.0.4
Test Spec	LoRa Alliance End-Device Certification Requirements for AS920-923 ISM Band – v1.1.1
Supported optional features	<input checked="" type="checkbox"/> Adaptive Data Rate (ADR) <input checked="" type="checkbox"/> SF7BW250 <input checked="" type="checkbox"/> FSK50
Summary	IN COMPLIANCE
ATH Identifier.....	DEKRA – TWN
Test Engineer.....	Gavin Yang  2023-09-07
Approved by	Jimmy Chang Manager  2023-09-07
Date of issue.....	2023-09-07
Report Revision.....	01

Index

Competences and guarantees	3
General conditions	3
Uncertainty	3
Usage of samples.....	3
Details of Company requesting LoRaWAN Certification	4
Testing period	4
Test Environmental conditions.....	4
Report Revision History	4
Means of Testing Identification	5
Test setup	5
Appendix A – Test result	6
Appendix B – ICS	8
Appendix C – General Parameters	9
Appendix D - Photo of Sample Under Testing	10

Competences and guarantees

DEKRA Testing and Certification, Co., Ltd. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification, Co., Ltd. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification, Co., Ltd. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification, Co., Ltd. at the time of performance of the test.

DEKRA Testing and Certification, Co., Ltd. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification, Co., Ltd.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification, Co., Ltd.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification, Co., Ltd. and the Accreditation Bodies.

Uncertainty

N/A

Usage of samples

Samples undergoing test have been selected by: Murata Manufacturing Co., Ltd.

DUT Control ID	PSR-2043826
Model Name	CMWX1ZZABZ-108
Serial number	NA
Hardware Version	MP
Software Version	1.1.01
Firmware Version	1.1.01
Description	The module, part number CMWX1ZZABZ-108, has been designed to support for operation in 868MHz (EU), 915MHz (USA) and 920MHz (APAC) with a single modem firmware. Modem firmware is pre-flashed, so the module can be utilized as small size modem and require the application to run on an external host.
Date of DUT reception	2023-05-15

Details of Company requesting LoRaWAN Certification

Company name	Murata Electronics Europe
Contact Person	Samir Hennaoui
Address	18-22, avenue Edouard Herriot - Copernic-6, 92356 Le Plessis-Robinson Cedex, France

Testing period

Start Date	2023-05-23
Finish Date	2023-08-10

The tests have been performed at DEKRA Testing and Certification, Co., Ltd. (Taiwan)

Test Environmental conditions

The testing has been performed within the following limits:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 80 %

Report Revision History

Revision	Modification Date	Description
01	NA	Initial Report


Means of Testing Identification

Following equipment was used to perform the testing:

Test System	LoRaWAN Certification Test System		
Hardware:	Control No.	Equipment	Serial No.
	0742	Control PC with LCTT installed	GANXCV193086433
	0741	CoreCell Gateway	-
	0559	LoRaWAN LCTT - UI version: 2.5.0 - Technology Package: LCTT v3.10.0_R2	

Test setup

The configuration used for Test Cases in nominal temperature conditions was the following one:

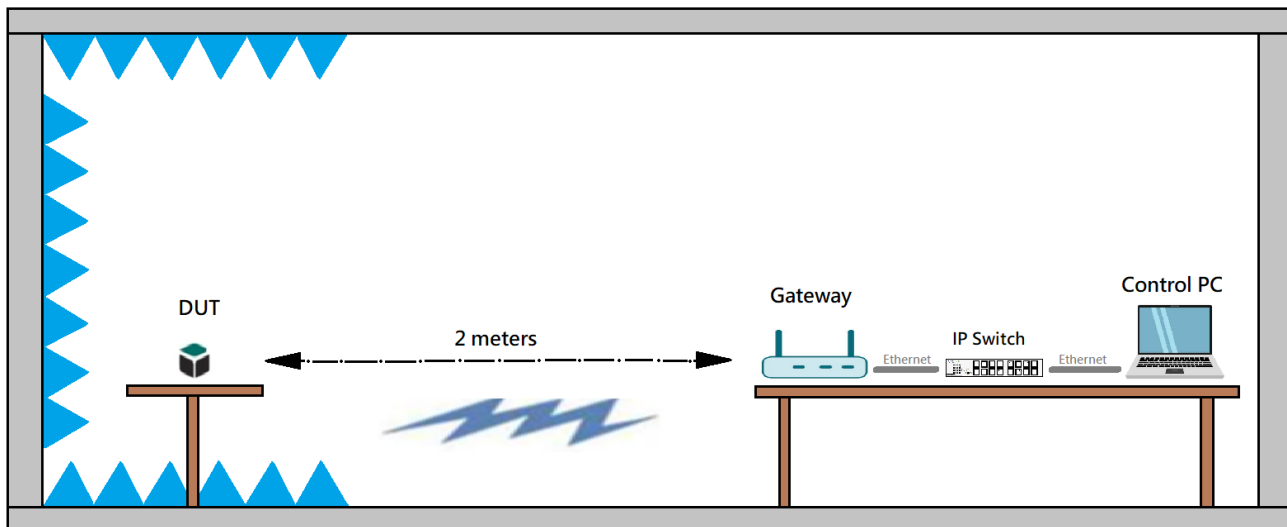

Appendix A – Test result

The abbreviations used in the header row of the test campaign report tables are:

Test Case ID:	Test case identifier.
Description:	Test case description, as it can be found on the referred standard.
Date:	Date of the beginning of the execution.
Verdict:	Records the verdict assigned to each Test case run to completion. Following verdicts are possible: Pass: If the Test case passed. Fail: If the Test case failed. NA: Not applicable. NM: Not measured.
Additional Note.:	Provides a reference to additional information relevant to the test presented in “Test Setup” section.

Activation Mode: OTAA

Test Case ID	Description	Verdict	Date	Additional Notes.
TP_A_AS923_ED_MAC_BV_000	Test mode activation	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_001	Test application functionality	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_002	Over the Air activation	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_003	Downlink error rate	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_004	AES encryption and message integrity	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_005	Downlink window timing	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_006	Frame sequence number	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_007	DevStatusReq MAC command	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_008	MAC Commands	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_009	NewChannelReq MAC command	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_010	DiChannelReq MAC command	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_011	Confirmed packets	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_012	RXParamSetupReq MAC command	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_013	RXTimingSetupReq MAC command	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_014_A	LinkADDRReq MAC command (Part 1)	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_014_B	LinkADDRReq MAC command (Part 2)	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_015	Packet Error Rate RX1	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_016	Packet Error Rate RX2	Pass	2023-08-10	
TP_A_AS923_ED_MAC_BV_017	TXParamSetupReq MAC command	Pass	2023-08-10	

Activation Mode: ABP

Test Case ID	Description	Verdict	Date	Additional Notes.
TP_A_AS923_ED_MAC_BV_000	Test mode activation	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_001	Test application functionality	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_003	Downlink error rate	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_004	AES encryption and message integrity	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_005	Downlink window timing	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_006	Frame sequence number	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_007	DevStatusReq MAC command	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_008	MAC Commands	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_009	NewChannelReq MAC command	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_010	DIChannelReq MAC command	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_011	Confirmed packets	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_012	RXParamSetupReq MAC command	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_013	RXTimingSetupReq MAC command	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_014_A	LinkADRReq MAC command (Part 1)	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_014_B	LinkADRReq MAC command (Part 2)	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_015	Packet Error Rate RX1	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_016	Packet Error Rate RX2	Pass	2023-08-08	
TP_A_AS923_ED_MAC_BV_017	TXParamSetupReq MAC command	Pass	2023-08-08	

Appendix B – ICS

Item	Name	Value
1	DUT works in Asia 923MHz ISM Band	TRUE
2	DUT implements LoRaWAN v1.0.2rB certification requirements	TRUE
3	DUT implements LoRaWAN v1.0.4 certification requirements	FALSE
4	DUT is a Class A Device (All End Devices)	TRUE
5	DUT supports Adaptive Data Rate (ADR) feature	TRUE
6	DUT supports LinkADRReq block	TRUE
7	DUT supports DChannelReq MAC command	TRUE
8	DUT supports Over-The-Air Activation (OTAA) mechanism	TRUE
9	DUT needs a reset after deactivating Test Mode	FLASE
10	DUT supports Trigger Join Request command in Test Mode	TRUE

Appendix C – General Parameters

Item	Name	Value
GW	Default TX Antenna	0
	List of IP address of the GWs	192.168.31.228
	Gateway model	CoreCell
	Number of supported channels in Gateway	8 Channels
	Default TX Power	14 dBm
	Gateway Socket Port	1780
	Gateway supports LR-FHSS	FALSE
	Size of the reception window	100
	Number of GWs	1
TM	General Timer	90 min
	Network Server IP Address	192.168.31.16
	Verbosity level for Logs	TRUE

Appendix D - Photo of Sample Under Testing

